

# MP750-MP825E

Since 1994 Marapco Generating Sets have provided reliable, dependable and trustworthy power solutions for the global market. Marapco Generating Sets combine quality and performance to deliver a superior product, making Marapco a market leading Generating Set throughout the Middle East, Asia & Africa.

## Generator Output Rating at - 50Hz

	KVA	KW
380-415V		
<b>Prime</b>	750.0	600.0
<b>Standby</b>	825.0	660.0

@ 0.8 p.f.

## Generator Output Rating at - 60Hz

	KVA	KW
480V		
<b>Prime</b>	750.0	600.0
<b>Standby</b>	825.0	660.0

@ 0.8 p.f.

## Engine Data

<b>Engine Manufacturer:</b>	Perkins UK
<b>Engine Model:</b>	4006-23TAG2A
<b>Number of Cylinders:</b>	6
<b>Cylinder Arrangement:</b>	Vertical In Line
<b>Cycle:</b>	4 Stroke
<b>Bore/Stroke mm (in):</b>	160.0 (6.3) x 190.0 (7.5)
<b>Induction:</b>	Turbo charged & air - to- air Charge cooled
<b>Compression ratio:</b>	13.6:1
<b>Displacement l (cu.in):</b>	22.9 (1398.7)

## General Data

	Liter	US/Gal
<b>Fuel Tank Capacity:</b>	N/A	N/A
<b>Fuel Tank:</b>	N/A	
<b>Base Frame:</b>	Heavy Duty-Powder Coated	
<b>Control Panel:</b>	Deep Sea Electronics	
<b>Circuit Breaker:</b>	ABB 3 Pole MCCB	

## Performance

	50Hz		60Hz	
<b>Engine Speed:</b>	1500		1800	
<b>Gross Engine Power:</b>	<i>kWm</i>	<i>Bhp</i>	<i>kWm</i>	<i>Bhp</i>
<i>Prime:</i>	658.0	882.0	684.0	917.0
<i>Standby:</i>	721.0	967.0	759.0	1018.0
<b>Fuel Consumption:</b>	<i>L/Hr</i>	<i>US Gal/Hr</i>	<i>L/Hr</i>	<i>US Gal/Hr</i>
<i>Prime:</i>	155	41.0	177.0	46.8
<i>Standby:</i>	169	44.6	199.0	52.6

## Standard Reference Conditions:

Output ratings are presented at normal conditions of temperature and pressure. This generator set is designed to operate in high ambient temperatures and altitudes.

Please consult your dealer for specific site ratings.

## Dimensions and Weights

Length		Width		Height		Dry		Wet	
Millimeter	Inch	Millimeter	Inch	Millimeter	Inch	KG	LB	KG	LB
4554.0	179.3	1933.0	76.1	2234.0	87.9	N/A	N/A	5500.0	12125.4

\* With Lube Oil

\* With Lube Oil & Coolant

## Marapco Ltd

8 Meadowbank Rd - Carrickfergus - N. Ireland - U.K. BT38 8YF  
Tel: +44 (0) 2893 355674 - www.marapco.com - Email: sales@marapco.com

## Rating Definition

### **P** Prime Rating

These rating are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. This model can supply 10% overload power for 1 hour in 12 hours.

### **S** Standby Rating

These rating are applicable for supply continuous electrical power (at variable load) in the event of utility power failure. No *overload is permitted on these ratings*. The alternator model is peak continuous rated (as defined in ISO 8528-3)

## Air Flow

50 Hz      60 Hz

	M <sup>3</sup> /min	Ft <sup>3</sup> /min	M <sup>3</sup> /min	Ft <sup>3</sup> /min
Combustion Air Flow:	71.9	2507	72.0	2543
Exhaust Gas Flow:	180.0	6357	190.0	6710
Radiator Cooling Air Flow:	1200.0	42378	1320.0	46615

\*Cooling system designed to operate in high ambient conditions

## Alternator Data

Alternator Manufacturer:	Leroy Somer
Alternator Model:	TAL/LSA 49.1 M75
Number of Bearings:	Single (1)
Insulation Class:	H
Total Harmonic Content:	4.00%
Wires:	6
Ingress Protection Rating:	IP 23
Excitation System:	AREP
Winding Pitch Code:	2/3 - 6S

## Principles



Perkins manufactures diesel engines and power solutions to the highest levels of performance and reliability. MARAPCO incorporates this engine throughout their full range.

### Diesel Power



Leroy Somer is a world leader in the manufacturing of power generation, combining quality with performance to produce a market leading alternator for MARAPCO.



Deep Sea Electronics control modules deliver unrivaled functionality and performance. MARAPCO generating sets use this latest technology to its full potential.


## Cooling & Lubrication

50 Hz

60 Hz

	Liter	US/Gal	Liter	US/Gal
Coolant Capacity:	105.0	27.7	105.0	27.7
Lube Oil Capacity:	113.0	30.0	113.0	30.0

	°C	°F	°C	°F
Exhaust Temperature:	430	806	430	806

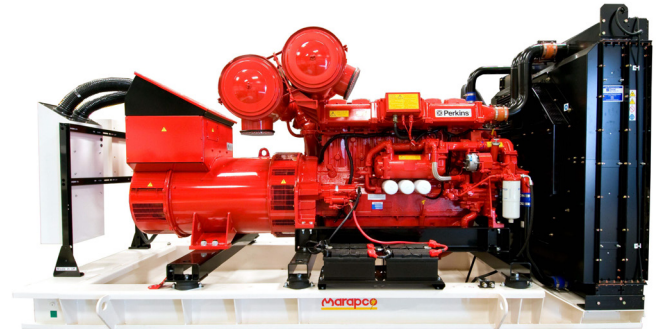

## Other Information

### Generating Set Standards


This generating set meets the following standards: ISO8528, BS4999, BS5514, IEC60034, VDE0530

### Warranty

This generator is covered against manufacturing and workmanship defects. Kindly refer to warranty statement for more details.

*Picture shown in leaflet may include optional accessories*

## Distributed & Serviced by:



Logos and Brands of Perkins, Leroy Somer, ABB & Deep Sea Electronics are Registered Trademarks

1604/2016

## Marapco Ltd

8 Meadowbank Rd - Carrickfergus - N. Ireland - U.K. BT38 8YF  
Tel: +44 (0) 2893 355674 - www.marapco.com - Email: sales@marapco.com